

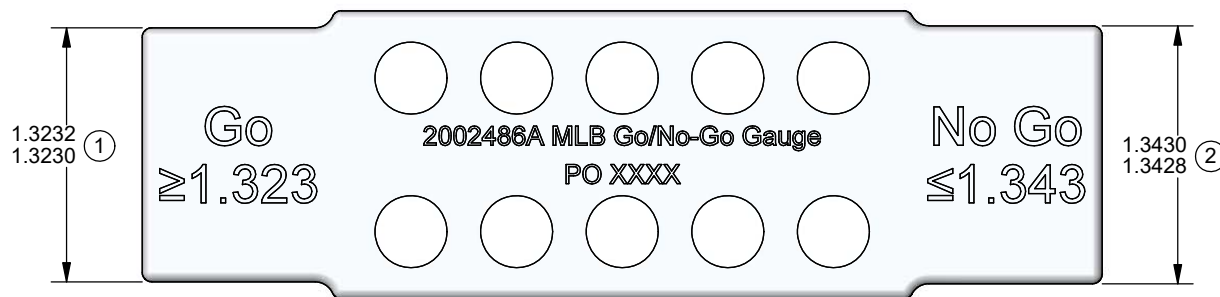
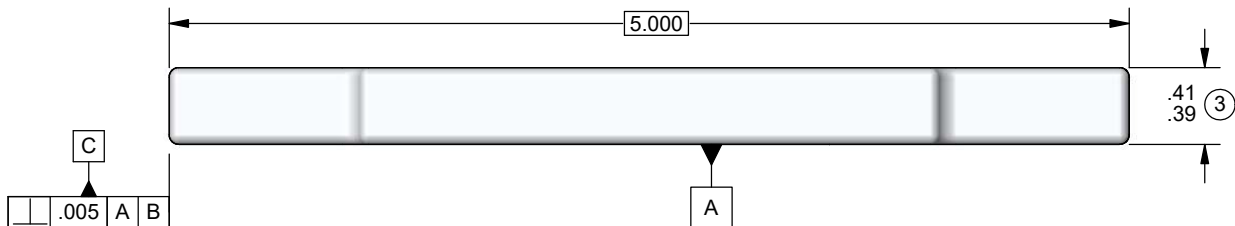


**NOTES**

1. Material: Al-Aly 7050-T7451, 7050-T7651, or 7075-T651
2. Part Marking: Engrave as shown. Replace 'XXXX' with actual PO number.
3. Surface Treatment: None.
4. Cleanliness: Part shall be delivered visibly clean, to the normal unaided eye, of all particulate matter and non-particulate film matter.

**REVISIONS**

Rev	Change Description	Date	By	Chk
-	Initial Revision	16-Jul-13	AZ	RH
A	Changed from steel to aluminum. Reduced width and added holes. Removed fillets.	9Oct18	RH	RW

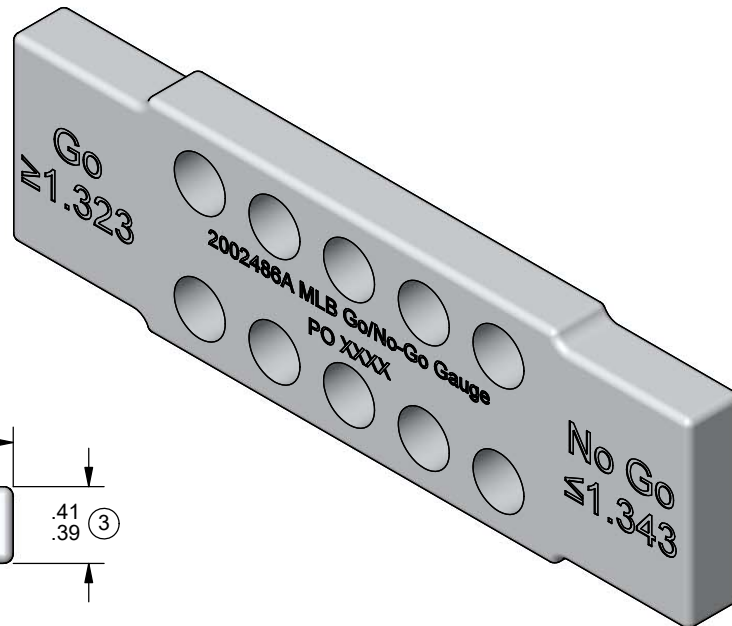

Unless Otherwise Specified

1. All dimensions are in inches  
 2. Interpret per ASME Y14.5-2009  
 3. Dimensions apply AFTER all surface treatments  
 4. Remove all burrs and sharp edges, R.01 max  
 5. Internal sharp edges may have R.01 max  
 6. Thread depths are a minimum  
 7. Inspect all numbered dimensions.

Tolerances

.XXX ± .001		A	B	C
.XX ± .005		A	B	C
.X ± .01				
.X ± .03				
X ± .2				

Hole diameters ±.010

Max surface roughness	Material: see Note 1	TITLE <b>MLB Go No Go Stow Gauge</b>	
Third Angle Projection	Do not scale from drawing	SIZE <b>A</b>	NUMBER <b>2002486</b>
		SCALE 1:1	REV <b>A</b>
		CAGE CODE: 1PHA7	SHEET 1 OF 1